


Technical data for Jøtul GF 200 DV II Lillehammer

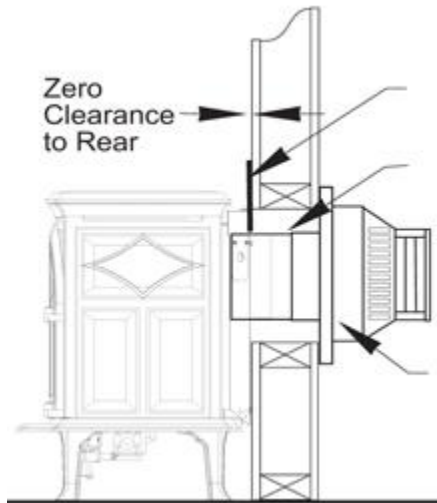

Jøtul GF 200 DV II Lillehammer

- BTU range: 20,000 Max BTU input - 8,440 Low output
- Efficiency: Up to 87% Steady State (A.F.U.E. 73%)
- Heating capacity: Up to 800 sq.ft.
- Finish options: Matte Black Paint, Blue/Black and Majolica Brown Enamel
- Flue outlet: Rear
- Gas types: Natural Gas, LP
- Accessories: Antique brick panel kit, Wall thermostat, Variable speed blower fan kit, Screen for open door fire viewing, Remote control, Leg leveler kit, Floor bracket kit (for mobile home installations) long legs (8")

Jøtul has a policy of constant improvement and upgrading. Products therefore may differ in specification, design, material or dimensions at any time without prior notice.